



PELLET STOVES

QUADRA-FIRE
NOTHING BURNS LIKE A QUAD

PERFORMANCE FROM THE BEGINNING



Founders Alan Trusler and Dan Henry spent countless nights in the lab, determined to harness the powerful force of fire in ground-breaking new ways. In 1990 they introduced the first self-igniting pellet stove using Original Energy Technology. In 2014 Quadra-Fire launched Efficient Energy technology.


WHY QUADRA-FIRE

For more than 30 years, Quadra-Fire has put performance and easy operation above all else. Today these ideals are vibrant and alive with these pellet products, delivering maximum heat with high efficiencies along with easy operation, allowing you to fill the hopper, set your thermostat and walk away.

WHY PELLETS

Clean-burning and consistent, pellets are affordable, available and renewable. Pellets are normally available in 40 lb bags. A 1,500 sq ft home will use 2-4 tons per season, on average.

As the fire ignites, it remains clear:
NOTHING BURNS LIKE A QUAD.

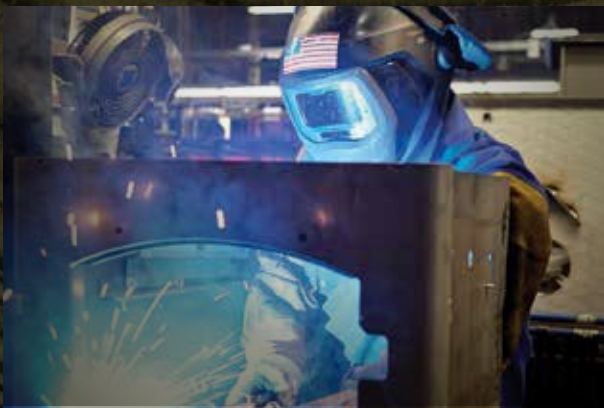

COVER: TREKKER SHOWN IN PORCELAIN TWILIGHT WITH OPTIONAL LOG SET

EXCLUSIVE TECHNOLOGIES

Innovative technology is at work in every Quadra-Fire. These advancements make it possible to burn pellets more effectively, efficiently, and with more control.

EFFICIENT ENERGY

E2

Efficient Energy (E2) technology helps achieve 83.2% efficiency—saving money by burning less fuel. Plus E2 automatically adjusts the blower to maintain desired room temperature, and allows five manual heat output settings. Standard 7-day, wireless programmable wall thermostat allows you to run your appliance based on your personal comfort level all day or up to four different times each day.

ORIGINAL ENERGY

OE

Original Energy (OE) delivers performance using an aluminum heat exchange system and three heat output settings. The easy operation of a patented jam-free feed system and easy-clean firepot delivers a reliable heat source. Standard wall thermostat allows you to set your target room temperature and walk away.

TREKKER
EFFICIENT ENERGY



TREKKER SHOWN IN PORCELAIN FROST WITH OPTIONAL LOG SET

BTU/hr Input¹
16,400-51,000

Heating Capacity²
1,300-2,900 sq ft

Efficiency³
83.2%

Burn Rate
1.9-5.9lb/hr

Emissions
.74 g/hr

Hopper Capacity¹
80lb

Actual Weight
429lb



7-DAY WIRELESS PROGRAMMABLE WALL THERMOSTAT

Allows you to select your heat output level, fine tune your appliance based on installation and set a 7-day heating schedule. Powered by Bluetooth technology.



CAST IRON AIRFOIL HEAT EXCHANGER

This cast iron airfoil heat exchanger is the most efficient way to transfer the heat from your appliance to your room.



CAST IRON FIREPOT

The most efficient way to burn pellets, creating temperatures exceeding 1000 degrees, assuring the fuel is completely burned leaving only a fine ash behind. This ash is easily removed due to the patented firepot design.



CLASSIC BLACK



PORCELAIN TWILIGHT



PORCELAIN MAHOGANY



PORCELAIN FROST

CASTILE
ORIGINAL ENERGY



CASTILE SHOWN IN CLASSIC BLACK

BTU/hr Input¹
**9,400-
30,600**

Heating Capacity²
**700-1,900
sq ft**

Efficiency³
70.4%

Burn Rate
1.0-3.4lb/hr

Emissions
1.1 g/hr

Hopper Capacity¹
45lb

Actual Weight
258lb



7-DAY PROGRAMMABLE WALL THERMOSTAT
Allows you to run your appliance based on your personal comfort level all day or up to four different times each day.



ALUMINUM HEAT EXCHANGER
Easy to clean by simply pulling on the cleaning rods when your appliance is cold. Efficiently captures the heat from your appliance and uses the combustion blower to move that hot air into your space.



CAST IRON FIREPOT
The most efficient way to burn pellets, creating temperatures exceeding 1000 degrees, assuring the fuel is completely burned leaving only a fine ash behind. This ash is easily removed due to the patented firepot design.



CLASSIC BLACK



PORCELAIN MAHOGANY



PORCELAIN TWILIGHT

CLASSIC BAY 1200
ORIGINAL ENERGY



CLASSIC BAY 1200 SHOWN WITH STANDARD BLACK DOOR TRIM AND GRILLE, AND OPTIONAL LOG SET

BTU/hr Input¹
**15,900-
41,100**

Heating Capacity²
**1,000-2,700
sq ft**

Efficiency³
77.8%

Burn Rate
1.8-4.7lb/hr

Emissions
1.0 g/hr

Hopper Capacity⁴
80lb

Actual Weight
349lb



7-DAY PROGRAMMABLE WALL THERMOSTAT

Allows you to run your appliance based on your personal comfort level all day or up to four different times each day.



ALUMINUM HEAT EXCHANGER

Easy to clean by simply pulling on the cleaning rods when your appliance is cold. Efficiently captures the heat from your appliance and uses the combustion blower to move that hot air into your space.



CAST IRON FIREPOT

The most efficient way to burn pellets, creating temperatures exceeding 1000 degrees, assuring the fuel is completely burned leaving only a fine ash behind. This ash is easily removed due to the patented firepot design.

SANTA FE
ORIGINAL ENERGY



SANTA FE SHOWN WITH OPTIONAL LOG SET

BTU/hr Input¹
**9,400-
30,600**

Heating Capacity²
**700-1,900
sq ft**

Efficiency³
70.4%

Burn Rate
1.0-3.4lb/hr

Emissions
1.1 g/hr

Hopper Capacity¹
52lb

Actual Weight
240lb



7-DAY PROGRAMMABLE WALL THERMOSTAT

Allows you to run your appliance based on your personal comfort level all day or up to four different times each day.



ALUMINUM HEAT EXCHANGER

Easy to clean by simply pulling on the cleaning rods when your appliance is cold. Efficiently captures the heat from your appliance and uses the combustion blower to move that hot air into your space.



CAST IRON FIREPOT

The most efficient way to burn pellets, creating temperatures exceeding 1000 degrees, assuring the fuel is completely burned leaving only a fine ash behind. This ash is easily removed due to the patented firepot design.

OPTIONS



LOG SET

Gives you the look of burning logs.

- » TREKKER
- » CASTILE
- » CLASSIC BAY 1200
- » SANTA FE







REMOTE CONTROL THERMOSTAT

Allows you to run your appliance based on your personal comfort level.

- » CASTILE
- » CLASSIC BAY 1200
- » SANTA FE

STOVE COMPARISON

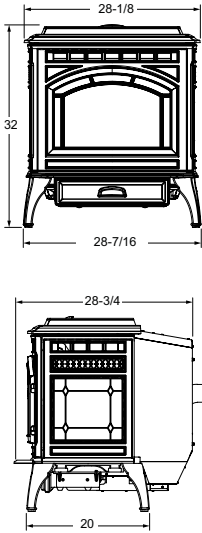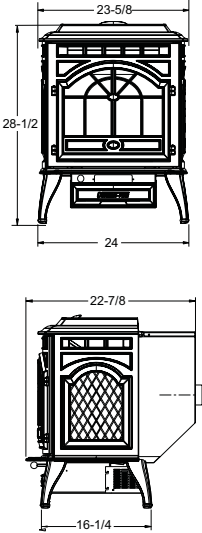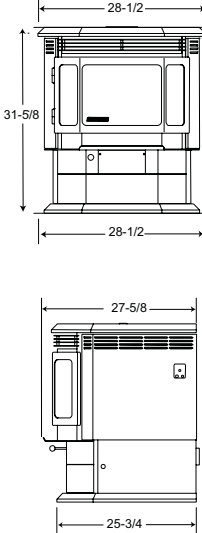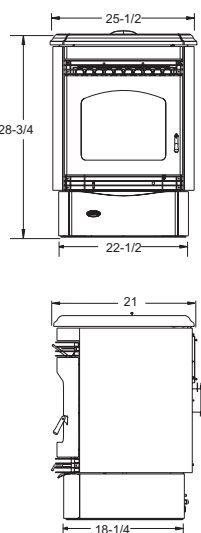
TREKKER	CASTILE	CLASSIC BAY 1200	SANTA FE
			
BTU/HR INPUT¹ » 16,400-51,000	BTU/HR INPUT¹ » 9,400-30,600	BTU/HR INPUT¹ » 15,900 - 41,100	BTU/HR INPUT¹ » 9,400-30,600
HEATING CAPACITY² » 1,300 - 2,900 sq ft	HEATING CAPACITY² » 700 - 1,900 sq ft	HEATING CAPACITY² » 1,000 - 2,700 sq ft	HEATING CAPACITY² » 700 - 1,900 sq ft
EFFICIENCY³ » 83.2%	EFFICIENCY³ » 70.4%	EFFICIENCY³ » 77.8%	EFFICIENCY³ » 70.4%
EMISSIONS » .74 g/hr	EMISSIONS » 1.1 g/hr	EMISSIONS » 1.0 g/hr	EMISSIONS » 1.1 g/hr
HOPPER CAPACITY » 80lb	HOPPER CAPACITY » 45lb	HOPPER CAPACITY » 80lb	HOPPER CAPACITY » 52 lb
ACTUAL WEIGHT » 429lb	ACTUAL WEIGHT » 258lb	ACTUAL WEIGHT » 349lb	ACTUAL WEIGHT » 240lb
TECHNOLOGIES » Efficient Energy (E2)	TECHNOLOGIES » Original Energy (OE)	TECHNOLOGIES » Original Energy (OE)	TECHNOLOGIES » Original Energy (OE)

CORNER HEARTH PAD CLEARANCES


	A	B	C	D	E
Trekker	24-1/4"	6"	39-3/4"	44-1/8"	22-5/8"
Castile	15"	6"	33-1/4"	39-1/2"	22-5/8"
Classic Bay 1200	21-1/2"	6"	41-3/8"	47-3/4"	26-1/4"
Santa Fe	15"	6"	32-1/4"	39-5/8"	22-3/4"

-Clearance doesn't include dimension of pipe or adapter used.

-Hearth pad clearances are US only; see manual for Canadian requirements.

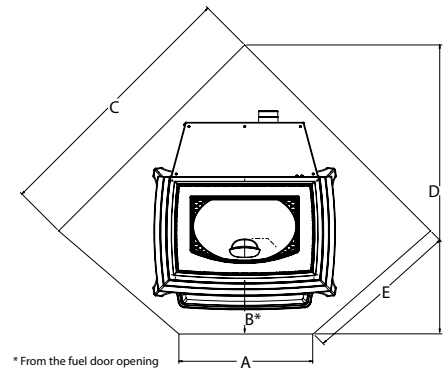


FLOOR PROTECTION - ALL STOVES



Use a noncombustible floor protector extending beneath appliance and to the front/sides/rear as indicated. Measure front distance (K) from surface of glass door. Approved for use with Type 1 hearth pad.

I... 2"
J*.. 2"
K... 6"

* See owner's manual for exceptions



Must extend 2" beyond each side of pipe (shaded area)

IMPORTANT - READ BEFORE YOU INSTALL Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions on this brochure are provided to assist you in product selection only.

Thank you from everyone at Quadra-Fire

QUADRA-FIRE
NOTHING BURNS LIKE A QUAD

www.quadrafire.com | 800-926-4356

facebook.com/QuadraFire | twitter.com/QuadraFire | youtube.com/QuadraFirePower

Available From:

Limited Lifetime Warranty⁴

The strongest in the industry, Quadra-Fire provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

1 BTU/hour input based on the high feed rate per hour multiplied by BTU content of test fuel pellets. Fuel density and pellet shape will affect hopper capacity. 2 See your local Quadra-Fire dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. 3 Weighted average LHV (Low Heating Value) efficiency. 4 For full warranty details go to www.quadrafire.com.

IMPORTANT - READ BEFORE YOU INSTALL!

Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions in this brochure are provided to assist you in product selection only.

Quadra-Fire is a registered trademark of Hearth & Home Technologies. Product specifications and pricing subject to change without notice.

Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.quadrafire.com/fireplacesafety.